

PROJECTION



X1 60epson Eb-535w 3400 Lumens WXGA

Specifications:

Technology

- Projection System: Epson 3LCD, 3-chip technology
- LCD Panel: 0.55-inch with MLA (D8)

Optical

- Zoom: 1 - 1.35 (Digital Zoom)
- Screen Size: 39" to 116"
- Projection Distance: 87" screen 0.91m
- Throw Ratio: 0.48 (Zoom: Wide), 0.65 (Zoom: Tele)
- Projection Lens F Number: 1.60
- Projection Lens Focal Length: 6.4mm
- Focus Method: Manual Focus
- Offset: 9.51:-1

Image

- Colour Light Output: 3,400 Lumens

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao
 4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027
 Email: pippad@experiencewellington.org.nz



- White Light Output: 3,400 Lumens
- Resolution: WXGA
- Native Aspect Ratio: 16:10
- Contrast Ratio: 16,000:1
- Lamp Hours: Normal/Eco: 5,000/10,000 Hours
- Lamp Type: 215 W UHE
- Keystone Correction: Vertical: -15 to +15 degrees; Horizontal: -15 to +15 degrees

Connectivity

- Input: Video: 1 x RCA (Yellow), 1 x S-Video, 2 x Component (via D-sub 15-pin)
- Input: Computer: 2 x D-sub 15-Pin (RGB), 1 x USB 2.0 type B
- Input: USB Memory Device: USB Type A Ver.2.0
- Input: Three-In-One USB Display: 1 x USB 2.0 type B
- Input: Digital: 1 x HDMI
- Input: Audio: 1 x RCA (Red/White), 2 x Stereo mini jack
- Input: Control: 1 x USB 2.0 type B, RS232C
- Input: Epson USB Document Camera: 1 x USB 2.0 type B
- Network I/O:: RJ45 x 1 (100Mbps)
- Output: Video: D-sub 15 pin (black molding)
- Output: Audio: Stereo mini jack x 1
- Speaker Output: 16W

Advanced Features

- EasyMP Network & Control: Yes
- EasyMP Network Projection: Yes
- PC Free Presentations: Photo / Motion JPEG
- USB Plug 'n Play: Yes
- AV Mute Slide: Yes
- Instant Off: Yes
- Direct Power On/Off: Yes
- Security: Kensington-style lock provision, Padlock, Security cable hole, Password protect function
- Colour Modes: Dynamic, Theatre,

General

- Power Consumption: Lamp on: Normal: 298W / Eco: 221W
- Power Consumption: Standby: 0.28W (communication off)
- Noise Level: Normal/Eco 37/28dB
- Dimensions (D x W x H): 314.5 x 344 x 94 mm
- Weight: 3.7kg



X1 Panasonic PT-LX26HU Projector

- White Brightness 2,600 ANSI Lumens
- Resolution 1024x768
- Aspect Ratio 4:3 (XGA)
- Contrast 2,500:1 (full on/off)
- Dynamic Iris Yes
- Display Type 1 cm 3LCD Chips
- Color Processing 8-bit
- Video Modes 720p, 1080i, 525i, 525p, 576i, 576p, 625i, 625p, 1125i, 480p, 480i
- Lamp Life 3,000 hours / 4,000 hours (Eco)
- Included Lens 1.2x manual zoom , manual focus
- Optional Lenses No
- Lens Shift No
- Throw Distance 1.2 m - 8.6m Calculate Throw Distance
- Image Size 76 cm - 635 cm
- Throw Ratio 1.70:1 - 2.04:1 (D:W)
- Projector Placement For a 254cm diagonal screen, place the projector lens between 3.4 m and 4.1 m from the screen.
- Digital Zoom Yes
- Digital Keystone Vertical only
- Projector Size 10 cm x 35 cm x 25 cm (HxWxD)
- Weight 3.0 kg
- Audible Noise 37 dB / 29 dB (Eco)

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao

4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027


Email: pippad@experiencewellington.org.nz

- Internal Speakers 1.0 Watts Mono
- Power 297 Watts 100V - 240V
- Connection Panel
Composite: RCA
Network: RJ-45
RS232: DB-9pin
S-Video
VGA In: Dsub-15pin x 2
- Features Closed Captioning


AUDIO

1 - Speaker cables

 Speakers

 Shows which speaker cable is connected to which speaker

Audio Wayline Map Capital E Public Space

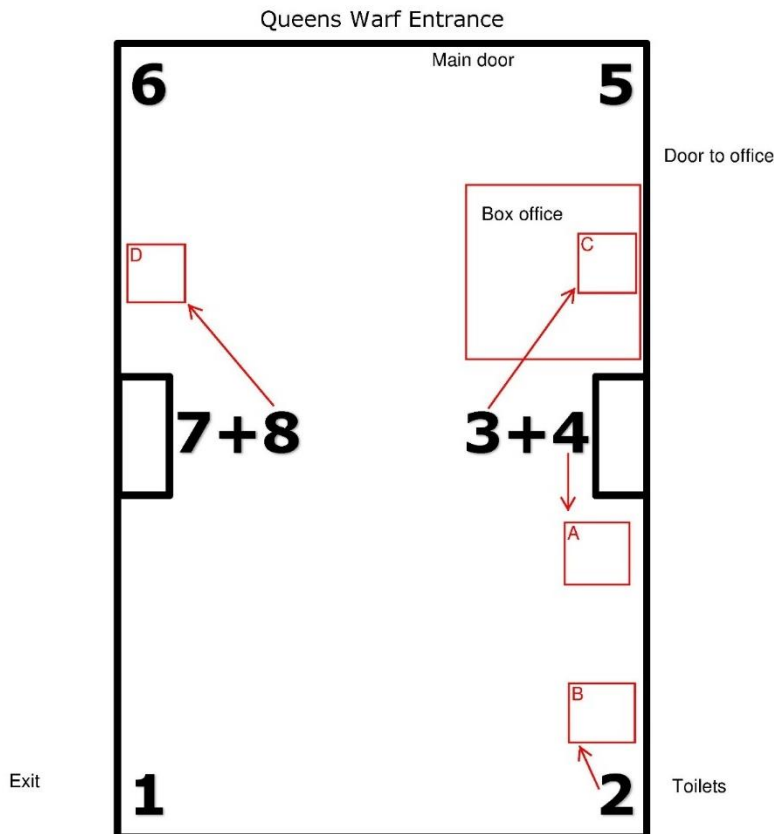

All waylines are terminated with Female 6.5mm Jack sockets, mono signal

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao
4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027
Email: pippad@experiencewellington.org.nz

Speakers



*x4 Sonos PLAY:5 (Gen 1) Wireless Speaker (Black)
+ x4 Flexson Wall Mounts*

Audio

Headphone	Auto-detecting 1/8" (3.5mm) headphone jack x1 (device speakers mute when headphones are connected).
Audio Line Input	Auto-detecting 1/8" (3.5 mm) audio line-in jack x 1
Speakers	Five-Driver Speaker System: two tweeters, two 3" (7.6 cm) mid-range drivers
Audio Formats	Support for compressed MP3, iTunes Plus, WMA (including purchased Windows Media

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao

4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027

Email: pippad@experiencewellington.org.nz




Supported	downloads), AAC (MPEG4), AAC+, Ogg Vorbis, Audible (format 4), Apple Lossless, Flac (lossless) music files, as well as uncompressed WAV & AIFF files. Native support for 44.1 kHz sample rates (additional support for 48, 32, 24, 22, 16, 11 & 8 kHz sample rates).
OS Support (For Stored Files)	Windows XP (SP3) or higher Mac OS X 10.6 or higher NAS devices supporting CIFS
Internet Radio Supported	Streaming MP3 Streaming WMA
Playback Modes	Crossfade Shuffle Repeat

General

Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	4 to 158°F (-20 to 70°C)
Power Supply	120 to 240 VAC, 50/60 Hz (auto-switchable)
Dimensions (WxHxD)	14.4 x 8.5 x 4.8" (36.5 x 21.7 x 12.3 cm)
Weight	9.2 lb (4.2 kg)

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao
 4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027
 Email: pippad@experiencewellington.org.nz

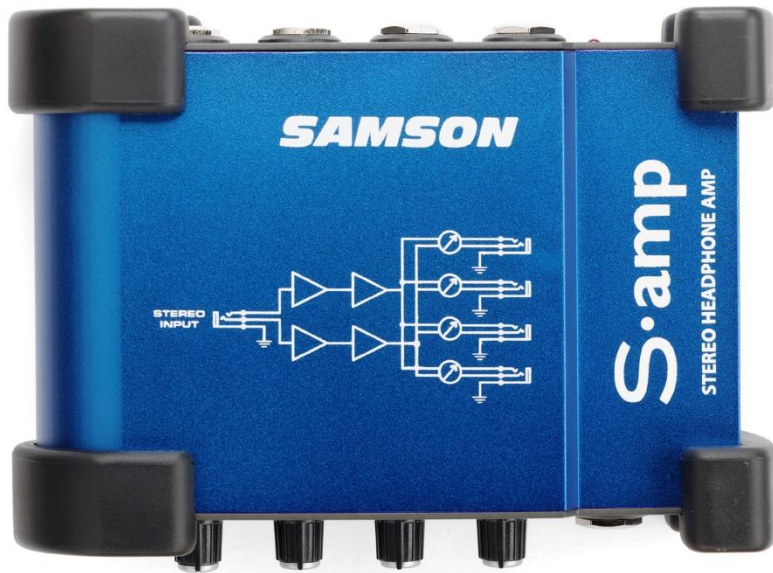

S-amp – Mini Stereo Headphone Amplifier

Features:

4-channel headphone amplifier

Four 1/4" stereo headphone outputs

Individual volume control for each headphone output

Stereo 1/4" input

18 Volt AC adapter included

[Read the Manual](#)

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes

Capital E, Nōku Te Ao

4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027

Email: pippad@experiencewellington.org.nz

LIGHTING



X10 Aluminum LED Par - RGBW - BAC300

BAC300 Aluminum LED Par

The BeamZ BAC300 is a slimline Aluminum LED ProPar, created by the latest LED technology. It includes 6x 8W 4-in-1 LEDs (RGBW). Highly efficient, natural convection cooling thanks to the attractive cast aluminium housing with heat sink design. There are no internal cooling fans in these PAR cans, which mean absolutely zero noise. The 4 push button LED menu allows for easy access to the functions including DMX, master/slave, sound activation and the stand alone function. Equipped with IEC in/out and XLR 3-pin in/out for daisy chaining multiple units together.

- 6x 8W 4-in-1 LEDs
- RGBW Colour mixing
- 3, 4 or 8 DMX channels
- Lightweight housing
- DMX and Stand-alone mode
- 0-100% Electronic Dimmer
- Master/Slave function
- IR remote control
- DMX in/output via 3-pin
- Pre programmed shows
- Sound activated with adjustable sensitivity

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao

4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027
 Email: pippad@experiencewellington.org.nz



- Auto mode with adjustable speed
- Control panel with LED display
- IEC connector input/output

Specifications

- Illuminance 2700lux @ 1m
- Beam angle 24°
- Field angle 42°
- No. of colours 4
- Colours RGBW
- No. of LEDs 6x 8W
- Flash rate per second 1-20Hz
- DMX channels 3, 4 or 8
- DMX connection 3-pin XLR
- Mode DMX, Auto, Sound active, Master-Slave and IRC
- Power supply 240VAC, 50Hz, 0.2-0.1A
- Display LED
- Dimensions 186 x 80 x 198mm
- Weight 1.1kg

X6 Birdie spots low voltage spotlight CT

- Lamp: MR16, 12v, 20w – 50w
- Ts: 100.0°C
- Ta: 25.0°C
- Input for integral transformer: 230v
- 50/60Hz, 0.33Amps

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes

Capital E, Nōku Te Ao

4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027

Email: pippad@experiencewellington.org.nz

Truss

Capital E has a small amount of truss available for use in an off-site storage facility.



X3 Tunnel Specs

<http://www.redpath.co.nz/domestic-greenhouses-home-products-original/tunnel-polyshadehouses.html>

- Width: 2.36m
- Lengths: 7.5m (6m +1.5m extension)
- Height: 2.3m apex
- 30mm square aluminium box section arch frames
- Each arch is 1.5m apart
- Door: 1 x Aluminium framed door + handle
- Door track: Aluminium with smooth roller ball bearings
- Base rails: 60mm x 30mm box section
- End covering: 30% shade cloth end walls and door for one end, plus PVC
- Roof and side covering: Clear PVC Cut to size
- Wind bracing diagonals included

Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao

4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027
Email: pippad@experiencewellington.org.nz

The whole structure screws together. The OVC Sheets are cut to size, but should not hinder the installation process much once frames are put together properly. Each set comes with all the screws, clips, and brackets needed for assembly.



Any queries regarding the detail in this document should be forwarded to
Pippa Drakeford, Kaiwhakarite Hōtaka - Production Manager, Public Programmes
Capital E, Nōku Te Ao
4 Queens Wharf, Wellington, 6011 Tel: +64 4 913 9027
Email: pippad@experiencewellington.org.nz